


FSB 1291 | Design: Foster + Partners Industrial Design

FSB ASL® set in Aluminium 0013


Door handle

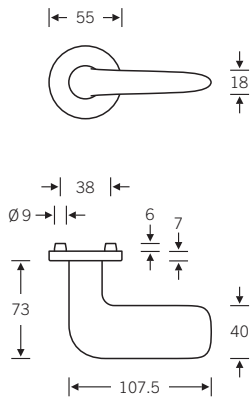


Pictured: Aluminium Pure (Raw Finish)

Knob


23 0871, for lever/knob sets

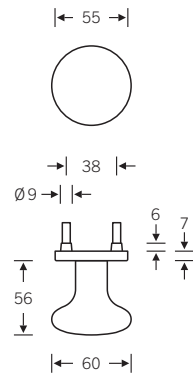

Key roses

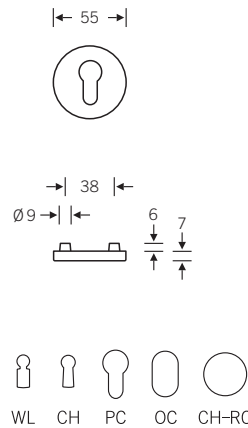

WC roses



Features

- Turnably fixed bearing with adaptor system
- Positive mechanism type A
- Stainless steel-reinforced base
- Standard door thickness 39–58 mm, max. door thickness 120 mm
- 20 mm door thickness increments
- Concealed handle bushing
- Suitable for both sides
- Operating angle 45°
- M5 stainless steel through-fixing, concealed
- Drill hole Ø 9 mm

Classification code

pursuant DIN EN 1906:2012-12, grade 4
4 | 7 | – | B* | 1 | 0**/5 | 0 | A

* testing in accordance with EN 1634-1 | ** bronze

Version	Square	Keyway	Item number
Lever/lever set	8 mm	PC WL	12 1291 01310 0013 12 1291 01302 0013
Lever/lever set	8 mm	without roses	12 1291 01320 0013
Lever/lever set	8 mm	blank	12 1291 01300 0013
Bathroom set	8 mm	WC-R/8 mm	12 1291 01954 0013
Lever/knob set right/left	8 mm	PC	12 1291 01510 0013

Design description

fsb.de/1291

L-shaped lever handle, short in plan view, large-surface and approximately rectangular in shape, bent at 90°, with a circular lever handle neck merging into a flat, horizontal and tapered handle, curved on both the top and bottom sides, and ending in a rectangular, soft-swinging shape.

Materials | FSB Colour Codes

www.fsb.de/materials

Aluminium anodised		Aluminium Pure	
0105	0205	0410	0013
0510 (C33)	0710 (C34)	0810 (C35)	

Aluminium powder-coated (further RAL colour shades to order)

8220	8120
------	------

Stainless Steel

6204	6205	6210 (PVD)	6208 (PVD)
------	------	------------	------------

Bronze patinated

7615	7625
------	------