


# Product line 52

## Mortice lock

for flush doors, centre type  
reversible for right and left hand application  
according to DIN 18251-1  
Class 5  
for high usage doors  
with high user frequency  
and increased burglar proofness



Classification code according to EN 12 209										
3	S	5	1	0	G	6	B	C	2	0

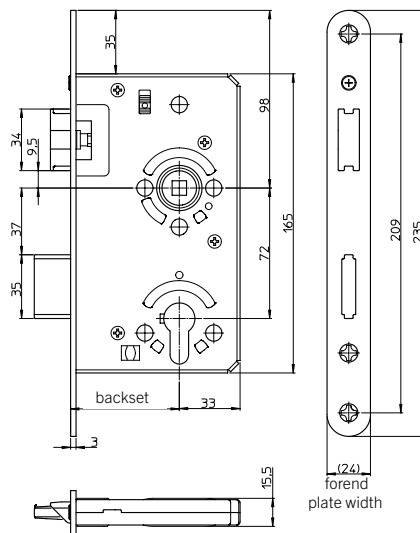

Mortice lock for flush doors	ES
Product line 52	52
- PZ double-turn with key operated spring bolt change	PZW
- WC type	WC
flat rounded forend plate	FR
forend plate width	
- 20 / 24 mm	24
backset sizes	
- 55 / 60 / 65 mm	55
centres	
- PZ 72 mm	72
- WC 78 mm	78
square follower size	
8 mm	08
handing	
- reversible	
forend design	
- Stainless steel non-corroding precision-ground (Material no. 1.4301)	EST
Equipment:	
- clamping follower made of steel galvanized	
- follower support of steel rings	
- latch precision cast nickel-plated	
- bolt made of high-strength refined special steel, bolt head cast nickel-plated	
- lock case all-around closed, galvanized and lacquered	
- sleeved bolt through fixing points	
- noise reduction for latch and follower	
- relubrication system	

## Options (Consider delivery times):

- flat forend edged FK
- forend design EST
- Front plate colours on stainless steel lacquered
  - Silver metallic silb
  - White white
- Front plate material
  - Brass polished (not for FH design) mspo
- backset 70 / 80 / 100 mm 70
- square follower 9 mm (FH design) 09
- square follower 10 mm 10



Example for article identification

ES 52 PZW FR 24 / 55 72 08 RS EST

ES 52 WC FR 24 / 55 78 08 RS EST

Fig.: WC type