


Product line 55 KF

Mortice lock with shared latch

according to DIN 18251-1
Class 5
for high usage doors
with high user frequency
and increased burglar proofness



Classification code according to EN 12 209										
3	S	8	1	0	G	6	B	C	2	0

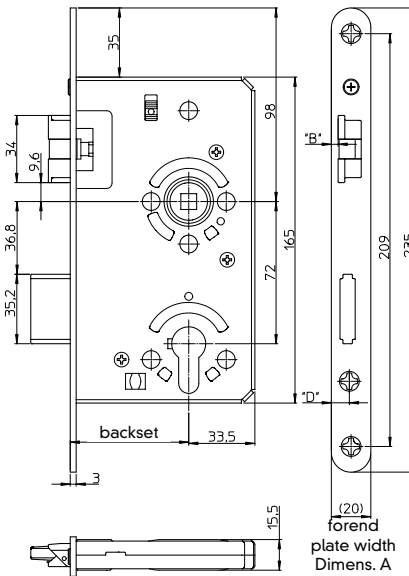

Dimens. A	Dimens. B	Dimens. D
20	3.4	9.1
24	5.4	11.1

- Mortice lock ES
- Product line 55 55
- with shared latch KF
- PZ double-turn with key operated spring bolt change PZW
- flat rounded - forend plate FR
- forend plate width - 20 / 24 mm 24
- backset sizes - 60 / 65 mm 65
- centres PZ 72 mm 72
- square follower size - 8 / 9 mm 08
- handing - right hand RS
- left hand LS
- forend plate design - Stainless steel non-corroding precision-ground (Material no. 1.4301) EST
- Equipment:
 - clamping follower made of steel galvanized
 - follower support of steel rings
 - crank latch made of steel nickel-plated
 - bolt made of high-strength refined special steel
 - bolt head cast nickel-plated
 - lock case all-around closed, galvanized and lacquered
 - sleeved bolt through fixing points
 - noise reduction for latch and follower
 - relubrication system

Options:

- flat forend edged FK
 - Front plate colours on stainless steel lacquered
 - silver metallic silb
 - white white
 - Front plate material
 - Brass polished (not for FH design) mspo
 - backset 70 / 80 / 100 mm 70
 - square follower 9 mm (FH design) 09
 - square follower 10 mm 10
- (Consider delivery times)



Fig.: WC type

Example for article identification

ES 55 KF PZW FR 24 / 65 72 08 RS EST
ES 55 KF WC FR 24 / 65 78 08 LS EST