


# Montageplatten / mounting plates

## UNIVERSALMONTAGEPLATTEN

(Serie 52020600)

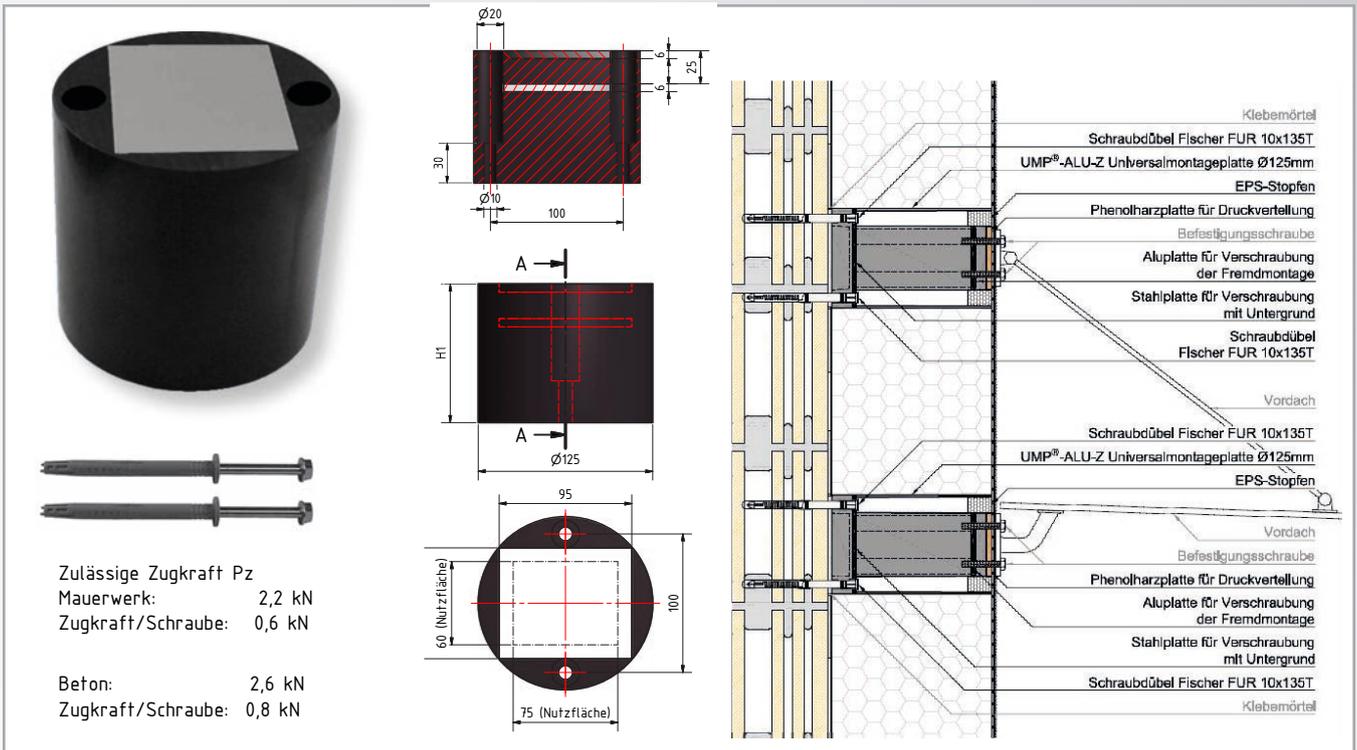

Zulässige Zugkraft Pz  
 Mauerwerk: 2,2 kN  
 Zugkraft/Schraube: 0,6 kN

Beton: 2,6 kN  
 Zugkraft/Schraube: 0,8 kN

Universalmontageplatten bestehen aus Hartschaum mit eingeschäumten Stahlkonsolen zur kraftschlüssigen Verschraubung mit dem Untergrund, einer Aluplatte für die Verschraubung der Fremdmontage sowie einer Phenolharzplatte, welche eine optimale Druckverteilung auf der Oberfläche gewährleistet. Inklusive Schrauben und Fischer FUR Dübel 10x135 (Befestigungsmaterial muss gegebenenfalls angepasst werden!)

### UNIVERSAL MOUNTING PLATES

Universal mounting plates are made of hard foam with framed steel panels for a force-fit screwing with the subfloor, an Aluminium-plate for the screwing of the external assembly, plus a phenolic resin plate, which ensures an optimal pressure distribution on the surface.

Delivery time approx. 2 weeks!

Lieferzeit ca. 2 Wochen!

### Hartschaum (hard foam)

Materialdicke (material thickness)	Artikelnummer	€/STK (pcs)
60 mm	52.02.0600	69,50
80 mm	52.02.0610	72,60
100 mm	52.02.0620	75,70
120 mm	52.02.0630	78,80
140 mm	52.02.0640	80,50
160 mm	52.02.0650	83,50
180 mm	52.02.0660	86,60
200 mm	52.02.0670	89,60
220 mm	52.02.0680	92,80
240 mm	52.02.0690	95,70
260 mm	52.02.0700	100,40
280 mm	52.02.0710	103,50
300 mm	52.02.0720	106,50

### Zulässige Querkraft Pq

Dicke (H1)	Kraft (kN) Mauerwerk		Kraft (kN) Beton	
60	2,9		3,3	
80	2,8		3,2	
100	2,6		3,0	
120	2,5		2,8	
140	2,3		2,6	
160	2,2		2,4	
180	2,0		2,3	
200	1,9		2,1	
220	1,7		1,9	
240	1,6		1,7	
260	1,4		1,5	
280	1,3		1,4	
300	1,1		1,2	

