


Product line ES 19

Mortice lock
for internal doors
according to DIN 18 251-1 Class 3



Classification code according to EN 12 209:										
3	M	5	0	0	G	3	H	C	2	0

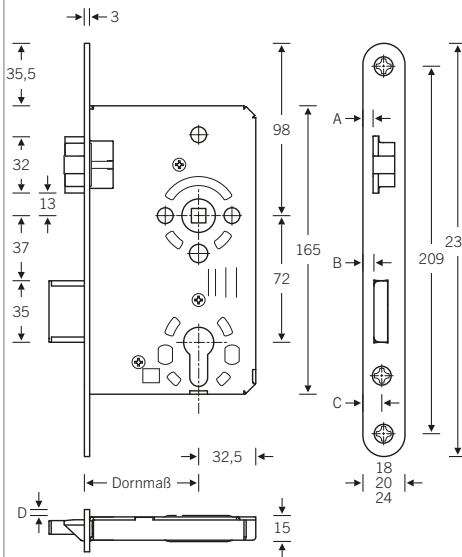

	Dimens. A	Dimens. B	Dimens. C	Dimens. D
18 mm	3,0	3,5	8,0	0,5
20 mm	3,4	3,9	8,5	1,0
24 mm	5,8	6,3	10,8	3,4

Mortice lock	ES
Product line 19	19
PZW double-turn with key operated WC variant	PZW WC
flat rounded:	FR
forend plate width:	
– 20 / 24 mm	20
backsets:	
– 55 / 60 / 65 mm	55
centres:	
– PZ 72 mm	72
– WC 78 mm	78
square follower size:	
– 8 mm □	08
handing details:	
– RH	RS
– LH	LS
forend design:	
– Steel silver metallic	silb

Equipment

- Self-tightening follower in steel with galvanised-steel follower hole bush
- Folded-type follower in galvanised steel
- latch and deadbolt in galvanised steel, with thermally bonded guide elements in polyamide for the purpose of damping sound from the lock and latchbolt

Options (please note delivery times)

- Flat forend with straight corners FK
- forend plate width 18 mm 18
- forend variant:
 - Hammer-gilded lacquered steel gold
 - white lacquered steel white
 - stainless steel EST
- latch lock FS
- deadbolt lock RS
- warded-lock variant + 1 key BB

Example for article identification:

ES 19 PZW FR 20 | 55 72 08 RS silb